

08/18/00
JCE97 U.S. PTO

58-21-00

A

JCE97 U.S. PTO
09/642190
08/18/00

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No. : 40164/DBP/Y35
Inventor(s) : Chul-Woo Park, and Kwon-Soo Choi
Title : VACUUM FLUORESCENT DISPLAY
Express Mail Label No. : EL366457845US

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Date: August 18, 2000

1. ☒ **FEE TRANSMITTAL FORM** (Submit an original, and a duplicate for fee processing).

2. **IF A CONTINUING APPLICATION**

___ This application is a ___ of patent application No. .

Prior application information: Examiner ; Group Art Unit:

___ This application claims priority pursuant to 35 U.S.C. §119(e) and 37 CFR §1.78(a)(4),
to provisional Application No. .

3. **APPLICATION COMPRISED OF**

Specification

15 Specification, claims and Abstract (total pages)

Drawings

7 Sheets of drawing(s) (FIGS. 1 to 12)

Declaration and Power of Attorney

___ Newly executed

☒ Unexecuted declaration

___ Copy from a prior application (37 CFR 1.63(d))(for continuation and divisional)

4. ___ **Microfiche Computer Program** (Appendix)

5. ___ **Nucleotide and/or Amino Acid Sequence Submission** (if applicable, all necessary)

___ Computer Readable Copy

___ Paper Copy (identical to computer copy)

___ Statement verifying identity of above copies

6. **ALSO ENCLOSED ARE**

___ Preliminary Amendment

___ A Petition for Extension of Time for the parent application and the required fee are
enclosed as separate papers

___ Small Entity Statement(s)

___ Statement filed in parent application, status still proper and desired

___ Copy of Statement filed in provisional application, status still proper and desired

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.: 40164/DBP/Y35


- _____ An Assignment of the invention with the Recordation Cover Sheet and the recordation fee are enclosed as separate papers
- _____ This application is owned by pursuant to an Assignment recorded at Reel , Frame
- _____ Information Disclosure Statement (IDS)/PTO-1449
- _____ Copies of IDS Citations
- X Certified copy of Priority Document(s) (*if foreign priority is claimed*)
- _____ English Translation Document (*if applicable*)
- X Return Receipt Postcard (MPEP 503) (should be specifically itemized).
- _____ Other

7. CORRESPONDENCE ADDRESS

CHRISTIE, PARKER & HALE, LLP, P.O. BOX 7068, PASADENA, CA 91109-7068

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By 
D. Bruce Prout
Reg. No. 20,958
626/795-9900

DBP/aam

**FEE TRANSMITTAL
UTILITY PATENT APPLICATION**

DATE: August 18, 2000

Docket No. :	40164/DBP/Y35
Inventor(s) :	Chul-Woo Park, and Kwon-Soo Choi
Title :	VACUUM FLUORESCENT DISPLAY

FEE CALCULATIONS					
CLAIMS		NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
A	TOTAL CLAIMS	12 - 20 =	0	0 x \$9.00	\$0.0
B	INDEPENDENT CLAIMS	1 - 3 =	0	0 x \$39.00	
C	SUBTOTAL	SMALL ENTITY FEE = A + B LARGE ENTITY FEE = 2 X (A + B)			0.0
D	BASIC FEE	SMALL ENTITY FEE = \$345.00 LARGE ENTITY FEE = \$690.00			690.00
E	MULTIPLE-DEPENDENT CLAIMS FEE	SMALL ENTITY FEE = \$130.00 LARGE ENTITY FEE = \$260.00			0.0
F	TOTAL FILING FEE (ADD LINES C, D, AND E)				690.00
List Independent Claims: 1					

METHOD OF PAYMENT

☒ No filing fee enclosed

☒ No Deposit Account Authorization.

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By D. Bruce Prout
D. Bruce Prout
Reg. No. 20,958
626/795-9900

VACUUM FLUORESCENT DISPLAY

BACKGROUND OF THE INVENTION

(a) Field of the Invention

The present invention relates to a vacuum fluorescent display (VFD) and, more particularly, to a vacuum fluorescent display which is provided with a metal rib for controlling thermal electrons extracted from filaments.

(b) Description of the Related Art

Generally, a vacuum fluorescent display is a display device where thermal electrons emitted from filaments are bombarded onto a phosphor layer while being controlled by a grid electrode and an anode electrode. Such a vacuum fluorescent display involves excellent visibility, wide viewing angle, low voltage driving, and high reliability.

The vacuum fluorescent displays may be formed with a diode structure, a triode structure, or a fourfold electrode structure. Among them, the triode-structured vacuum fluorescent display with filaments, anode electrodes, and control electrodes has been used most extensively.

Specifically, as shown in Fig. 1, the triode-structured vacuum fluorescent display includes a front substrate 102, a back substrate 104, and a side glass 106. A wiring layer 108 electrically interconnects the device components. An insulating layer 112 insulates a conductive layer 110 from the wiring layer 108 except the portions of through-holes to prevent unnecessary electrical shots. The conductive layer 110 makes electrical

current to be flowed from the wiring layer 108 to the phosphor layer 114 via the through-holes. The phosphor layer 114 is printed at an anode electrode with a predetermined pattern. Filaments 116 are spaced apart from the anode electrode while standing in the side of the front substrate 102 to emit thermal electrons. A metal mesh-typed control electrode 118 accelerates or intercepts the thermal electrons emitted from the filaments 116.

In the above structure, when voltage is applied to the filaments 116, the anode electrode and the control electrode 118 through a lead line 120, thermal electrons are emitted from the filaments 116. The emitted thermal electrons are accelerated and diffused by the control electrode 118, and bombarded onto the phosphor layer 114 of the anode electrode, thereby producing the desired display images.

The control electrode 118 is formed with a mesh grid that has a mesh made through etching a thin metal plate based on SUS, and a support fitted around the periphery of the mesh. The support keeps the mesh to be placed at a predetermined position such that it can control the thermal electrons emitted from the filaments 116.

Accordingly, when the mesh grids 118 are mounted onto the back substrate 104, a predetermined distance should be kept between the support and the anode electrode as well as between the neighboring mesh grids 118 to make the thermal electrons to correctly land on the phosphor layer 114, and to prevent leakage of light between the neighboring phosphor layers 114. For this reason, it becomes difficult to design minute patterns or complex polygonal

patterns in the vacuum fluorescent display using the mesh grid as a control electrode.

Furthermore, in the case of the mesh grid 118, the central portion of the mesh may be sunk due to thermal deformation during the manufacturing process and at use. In this case, the capacity of the mesh grid 118 for accelerating and diffusing thermal electrons is deteriorated, and hence, the neighboring phosphor layers 114 covered by the mesh grids 118 are differentiated in brightness.

Therefore, it is inevitable that the number of the supports should increase to prevent the central portion of the mesh grid 118 from being sunk. This is also an obstacle to patterning the anode electrode in a free manner.

Recently, it has been suggested that a conductive rib may be placed at the periphery of the anode electrode to function as a control grid instead of the mesh grid that involves disadvantages in structural aspect as well as in production cost.

In such a structure, as shown in Fig. 2, a conductive rib 118' is provided at the periphery of the anode electrode with the conductive layer 110 and the phosphor layer 114. The conductive rib 118' is formed through repeatedly printing a conductive material onto the anode electrode such that it has a thickness capable of performing the desired electron control.

The conductive rib 118' is usually formed through thick-film printing. In the thick-film printing, a solution of a conductive material is printed onto the anode electrode by a thickness of 10-30 μm , and dried.

Such a process is repeated three to fifteen times to thereby complete a conductive rib with a thickness of 100-150 μm , and this involves troublesome and long-term works.

Furthermore, during the printing process, the conductive rib 118' and the neighboring anode electrode are liable to suffer electrical short.

In addition, the gas generated from the conductive material is left within the vacuum cell while prohibiting free flow of electrons there. This causes deterioration in brightness, accompanied with decreased life span of the device.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a vacuum fluorescent display which can be fabricated through simplified processing steps while involving improved performance characteristics.

This and other objects may be achieved by a vacuum fluorescent display including a pair of substrates spaced apart from each other with a predetermined distance. The substrates form a vacuum cell by interposing a side glass. Filaments are mounted within the vacuum cell to emit thermal electrons under the application of voltage. Anode electrodes are formed at one of the substrates, each anode electrode unit having a conductive layer and a phosphor layer formed on the conductive layer. A control electrode surrounds the anode electrode to accelerate or intercept the thermal electrons emitted from the filaments. The control electrode is formed with a single-layered structure.

The control electrode may be formed with a metallic material such as stainless steel, platinum, silver and copper.

The anode electrode unit is formed with a plurality of segments, and the control electrode surrounds each segment of the anode electrode unit. The control electrode is formed in a body or in a separate manner, and has a main control part for accelerating and intercepting the thermal electrons, and a subsidiary control part for assisting the main control part in controlling the thermal electrons. The main control part surrounds each segment of the anode electrode, and the subsidiary control part is formed at a top end portion of the main control unit in a body. The subsidiary control part is formed with an extension where the top end portion of the main control unit is extended toward each segment of the anode electrode perpendicular to the main control member.

Alternatively, the subsidiary control part may be formed with a connector interconnecting top ends of the main control part such that the connector crosses each segment of the anode electrode.

A subsidiary control electrode based on a mesh grid may surround one or more of the control electrode units.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete appreciation of the invention, and many of the attendant advantages thereof, will be readily apparent as the same becomes better understood by reference to the following detailed description when

considered in conjunction with the accompanying drawings in which like reference symbols indicate the same or the similar components, wherein:

Figs. 1 and 2 are cross sectional views of vacuum fluorescent displays according to prior arts;

5 Fig. 3 is an exploded perspective view of a vacuum fluorescent display according to a first preferred embodiment of the present invention;

Fig. 4 is an amplified view of the vacuum fluorescent display shown in Fig. 3;

10 Fig. 5 is a combinatorial sectional view of the vacuum fluorescent display shown in Fig. 3;

Fig. 6 is a cross sectional view of a vacuum fluorescent display according to a second preferred embodiment of the present invention;

Fig. 7 is a schematic view illustrating the process of forming a control electrode for the vacuum fluorescent display shown in Fig. 6;

15 Fig. 8 is a perspective view of a vacuum fluorescent display according to a third preferred embodiment of the present invention;

Fig. 9 is a perspective view of a vacuum fluorescent display according to a fourth preferred embodiment of the present invention;

20 Fig. 10 is a perspective view of a vacuum fluorescent display according to a fifth preferred embodiment of the present invention;

Fig. 11 is a schematic view illustrating the process of forming a control electrode for the vacuum fluorescent displays shown in Figs. 8 to 10; and

Fig. 12 is a cross sectional view of a vacuum fluorescent display

according to a sixth preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of this invention will be explained with reference to the accompanying drawings.

5 Fig. 3 is an exploded perspective view of a vacuum fluorescent display according to a first preferred embodiment of the present invention, Fig. 4 is an amplified view of the vacuum fluorescent display, and Fig. 5 is a combinatorial sectional view of the vacuum fluorescent display.

As shown in the drawings, the vacuum fluorescent display includes a
10 front substrate 4 and a back substrate 6 that are combined with a side glass 2 to thereby form a vacuum cell. A wiring layer electrically interconnects structural components internal to the vacuum cell. An insulating layer 10 prevents unneeded electrical communications among the device components. Anode electrodes are formed on the insulating layer 10. Each anode
15 electrode unit includes a conductive layer 12 electrically connected to the wiring layer 8 via a dot layer, and a phosphor layer 14 formed on the conductive layer 12. A plurality of filaments 16 are fixedly mounted on the anode electrode via filament supports. A control electrode 18 is placed at the periphery of the anode electrode.

20 The control electrode 18 is formed with a metallic material having a high electrical conductivity while bearing a single-layered structure. The bottom end portion of the control electrode 18 is electrically connected to the

wiring layer 8, and sealed to the back substrate 6 via a frit.

The control electrode 18 functions as a grid electrode for accelerating or intercepting the thermal electrons emitted from the filaments 16.

The control electrode 18 is formed with stainless steel. Alternatively, depending upon the device characteristics, a metallic material having an electrical conductivity higher than that of the stainless steel such as platinum, silver, and copper may be used for the control electrode 18.

The control electrode 18 is formed with a predetermined thickness such that it can easily perform the electron control function. The thickness of the control electrode 18 may be varied in accordance with the device characteristics.

The metal rib-based control electrode 18 is structured to surround one anode electrode unit. For instance, in case seven segments come together to form an anode electrode unit, the control electrode surrounds each segment. The control electrode 18 surrounding one anode electrode unit may be formed in a body or in a separate manner.

Under the application of voltage, the control electrode 18 controls flow of the thermal electrons emitted from the filaments 16 to thereby switch on/off of the seven segments of the anode electrode unit.

Such a control electrode 18 may be formed through the following process.

First, a metal plate having a width corresponding to the target anode electrode unit and a thickness capable of performing the electron control is

prepared. The metal plate is partially etched through the usual photolithography process, and removed to thereby complete a metal rib with a particular pattern.

The metal rib is attached at the periphery of the anode electrode via a frit such that the metal rib is electrically connected to the wiring layer 8.

The control electrode 18 may be formed with various patterns, and the portions of the control electrode 18 for electrical communication with the wiring layer 8 and surrounding the anode electrode may be varied in shape in accordance with the device characteristics.

Fig. 6 is a cross sectional view of a vacuum fluorescent display according to a second preferred embodiment of the present invention. In this preferred embodiment, other components and structures are the same as those related to the first preferred embodiment except that the control electrode 18' is differentiated in shape.

As shown in Fig. 6, the control electrode 18' is provided with a main control part 18'a, and a subsidiary control part connected to the main control part 18'a in a body.

The subsidiary control part 18'a is to prevent the brightness and cut-off characteristics of the phosphor layer 14 from being deteriorated when the influential force of the main control part 18'a to the central portion of the anode electrode is decreased due to enlargement of the volume of the anode electrode. That is, the subsidiary control part 18'a makes the control electrode 18' to exert its control function well over the entire area of the enlarged anode

electrode.

The subsidiary control part is formed with an extension 18'b where the top end portion of the metal rib is extended toward the anode electrode perpendicular to the main body thereof such that the planar volume of the control electrode 18' is enlarged. In this structure, even if the anode electrode is patterned with a large volume, the control electrode 18' can perform its electronic control function in a fluent manner.

The extension 18'b of the control electrode 18' is not overlapped with the phosphor layer 14 such that it does not shadow the display pattern.

As shown in Fig. 7, the control electrode 18' with the extension 18'b can be easily formed through making photoresist patterns 22 on both surfaces of a metal plate 20, and double-etching the metal plate 20 through the photoresist patterns 22 such that it has the main control part 18'a and the subsidiary control part 18'b.

Figs. 8 to 10 illustrate vacuum fluorescent displays according to third to fifth preferred embodiments of the present invention. In these preferred embodiments, other components and structures of the vacuum fluorescent displays are the same as those related to the first preferred embodiment except that a connector 18''b is used as the subsidiary control part while interconnecting top portions of the main control unit 18''a such that it crosses each segment. As shown in Fig. 11, the control electrode 18'' with the connector 18''b can be easily formed through making photoresist patterns 22 on both surfaces of a metal plate 20, and double-etching the metal plate 20

through the photoresist patterns 22.

Fig. 12 is a cross sectional view of a vacuum fluorescent display according to a sixth preferred embodiment of the present invention where the vacuum fluorescent display has a fourfold electrode structure.

As shown in Fig. 12, the vacuum fluorescent display has a control electrode 18 for controlling the thermal electrons emitted from filaments 16, and a subsidiary electrode 24. The control electrode may be formed with a shape selected from those related to the first to fifth preferred embodiment. The subsidiary control electrode 24 is formed with a usual metal mesh shape surrounding one or more of the control electrode units 18.

Only one of the control electrode 18 and the subsidiary control electrode 24 may be provided at some electrode units to make three-dimensional images to be displayed.

That is, the metal rib-based control electrode 18 is provided only at the anode electrode units shown in the left side of Fig. 12, and the metal mesh-typed subsidiary control electrode 24 covers all of the control electrodes 18 and the anode electrode units shown in the right side of Fig. 12.

Of course, the control electrode 18 may be provided with a subsidiary control part such as an extension 18'b or a connector 18''b.

As described above, the control electrode for the vacuum fluorescent display can be fabricated in a simplified manner, and perform its electron control function in an effective manner. Furthermore, the subsidiary control electrode may be provided to assist the control electrode while improving the

performance characteristics of the device more efficiently.

While the present invention has been described in detail with reference to the preferred embodiments, those skilled in the art will appreciate that various modifications and substitutions can be made thereto without departing from the spirit and scope of the present invention as set forth in the appended claims.

5

09:43:19 08/18/00

WHAT IS CLAIMED IS:

1. A vacuum fluorescent display comprising:

a pair of substrates spaced apart from each other with a predetermined distance, the substrates forming a vacuum cell by interposing a side glass;

5 filaments mounted within the vacuum cell to emit thermal electrons under the application of voltage;

anode electrodes formed at one of the substrates, each anode electrode unit having a conductive layer and a phosphor layer formed on the conductive layer; and

10 a control electrode surrounding the anode electrode to accelerate or intercept the thermal electrons emitted from the filaments;

wherein the control electrode is formed with a single-layered structure.

2. The vacuum fluorescent display of claim 1 wherein the control electrode is formed with a metallic material having a high electrical conductivity.

15 3. The vacuum fluorescent display of claim 2 wherein the control electrode is formed with a metallic material selected from the group consisting of stainless steel, platinum, silver and copper.

4. The vacuum fluorescent display of claim 1 wherein the anode electrode unit is formed with a plurality of segments, and the control electrode surrounds each segment of the anode electrode unit.

20 5. The vacuum fluorescent display of claim 4 wherein the control electrode is formed in a body or in a separate manner.

6. The vacuum fluorescent display of claim 5 wherein the control

electrode comprises a main control part for accelerating and intercepting the thermal electrons, and a subsidiary control part for assisting the main control part in controlling the thermal electrons.

7. The vacuum fluorescent display of claim 6 wherein the main control part surrounds each segment of the anode electrode, and the subsidiary control part is formed at a top end portion of the main control unit in a body.

8. The vacuum fluorescent display of claim 7 wherein the subsidiary control part is formed with an extension where the top end portion of the main control unit is extended toward each segment of the anode electrode perpendicular to the main control member.

9. The vacuum fluorescent display of claim 7 wherein the subsidiary control part is formed with a connector, the connector interconnecting top ends of the main control part such that the connector crosses each segment of the anode electrode.

10. The vacuum fluorescent display of claim 5 further comprising a subsidiary control electrode surrounding one or more of the control electrode units.

11. The vacuum fluorescent display of claim 10 wherein the subsidiary control electrode is formed with a mesh grid.

12. The vacuum fluorescent display of claim 10 wherein only one of the control electrode and the subsidiary control electrode is provided at some of the anode electrodes.

ABSTRACT OF THE DISCLOSURE

A vacuum fluorescent display includes a pair of substrates spaced apart from each other with a predetermined distance. The substrates form a vacuum cell by interposing a side glass. Filaments are mounted within the vacuum cell to emit thermal electrons under the application of voltage. Anode electrodes are formed at one of the substrates, each anode electrode unit having a conductive layer and a phosphor layer formed on the conductive layer. A control electrode surrounds the anode electrode to accelerate or intercept the thermal electrons emitted from the filaments. The control electrode is formed with a single-layered structure.

FIG.1

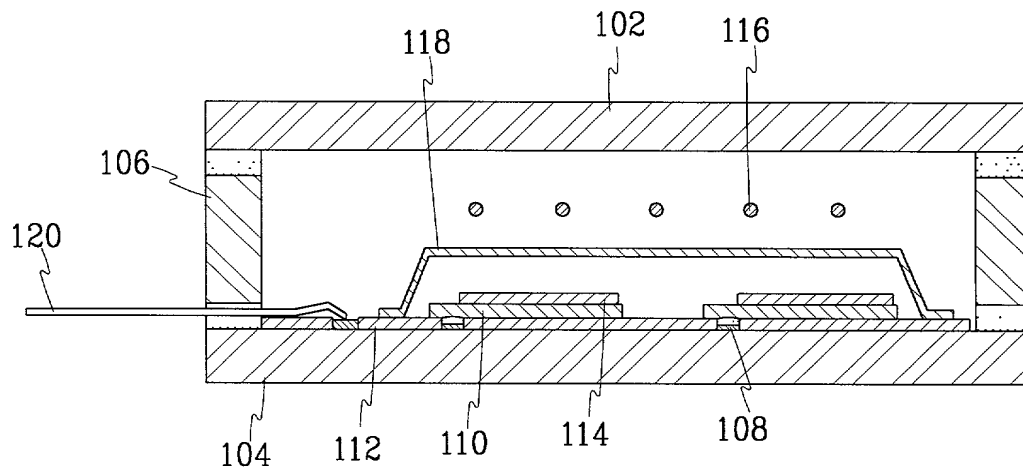


FIG.2

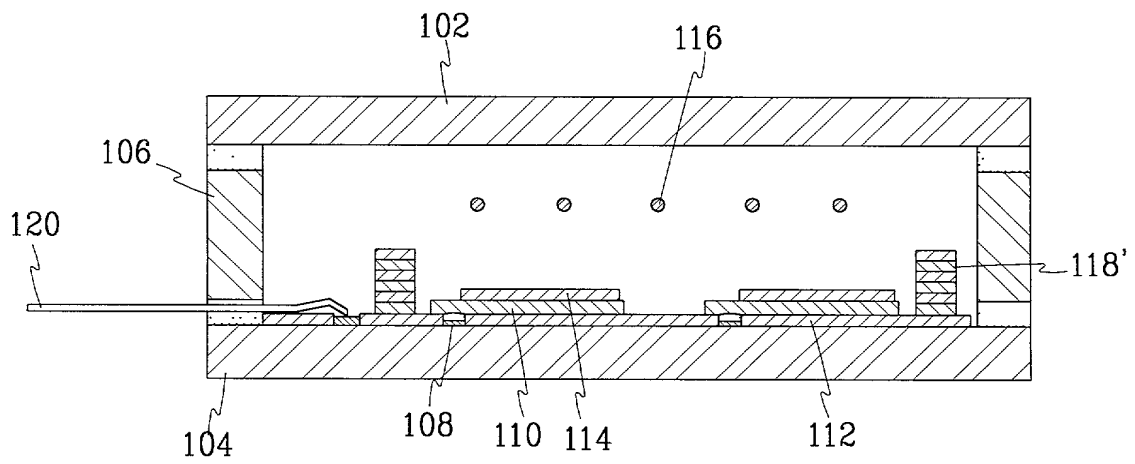


FIG. 3

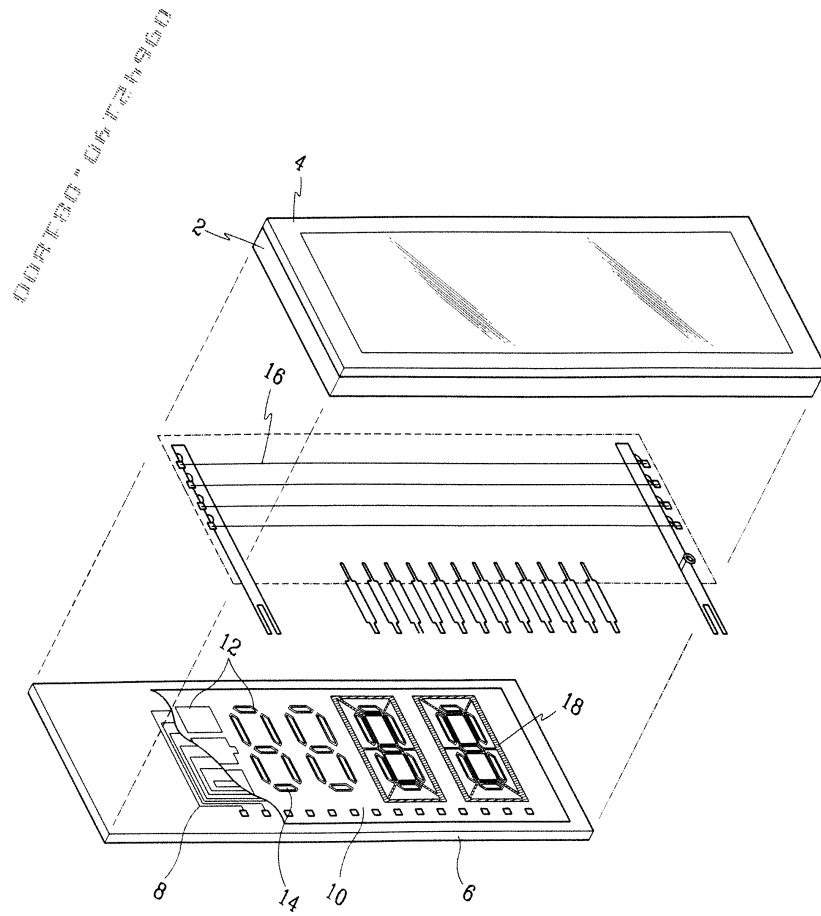


FIG.4


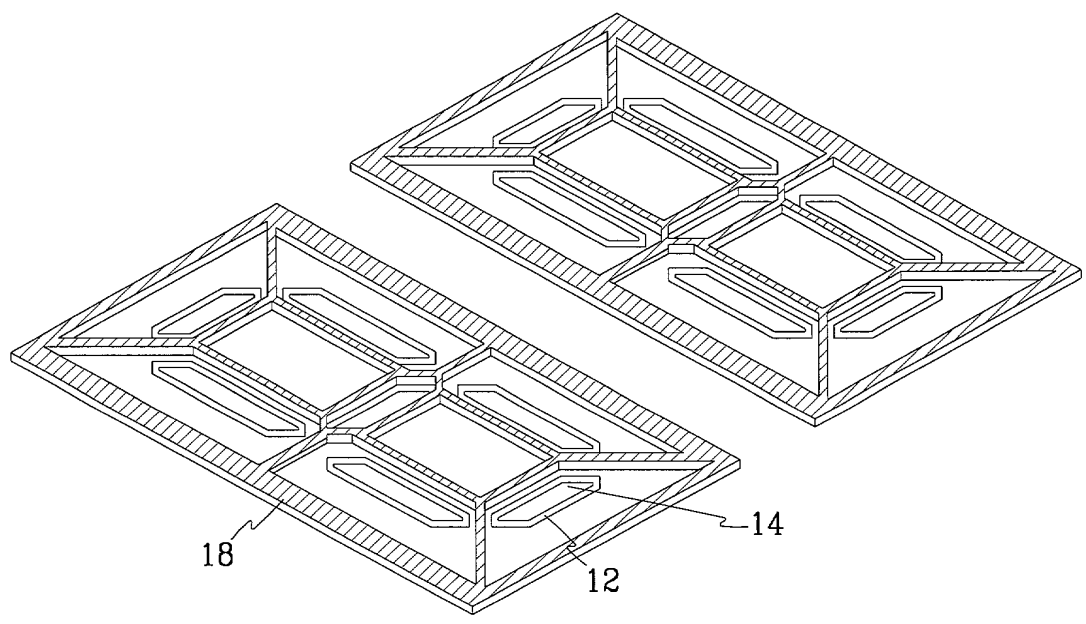


FIG.5



Coulam et al.	
Study	OR (95% CI)
Overall	1.0
Study	OR (95% CI)
1	1.0
2	1.0
3	1.0
4	1.0
5	1.0
6	1.0
7	1.0
8	1.0
9	1.0
10	1.0
11	1.0
12	1.0
13	1.0
14	1.0
15	1.0
16	1.0
17	1.0
18	1.0
19	1.0
20	1.0
21	1.0
22	1.0
23	1.0
24	1.0
25	1.0
26	1.0
27	1.0
28	1.0
29	1.0
30	1.0
31	1.0
32	1.0
33	1.0
34	1.0
35	1.0
36	1.0
37	1.0
38	1.0
39	1.0
40	1.0
41	1.0
42	1.0
43	1.0
44	1.0
45	1.0
46	1.0
47	1.0
48	1.0
49	1.0
50	1.0
51	1.0
52	1.0
53	1.0
54	1.0
55	1.0
56	1.0
57	1.0
58	1.0
59	1.0
60	1.0
61	1.0
62	1.0
63	1.0
64	1.0
65	1.0
66	1.0
67	1.0
68	1.0
69	1.0
70	1.0
71	1.0
72	1.0
73	1.0
74	1.0
75	1.0
76	1.0
77	1.0
78	1.0
79	1.0
80	1.0
81	1.0
82	1.0
83	1.0
84	1.0
85	1.0
86	1.0
87	1.0
88	1.0
89	1.0
90	1.0
91	1.0
92	1.0
93	1.0
94	1.0
95	1.0
96	1.0
97	1.0
98	1.0
99	1.0
100	1.0

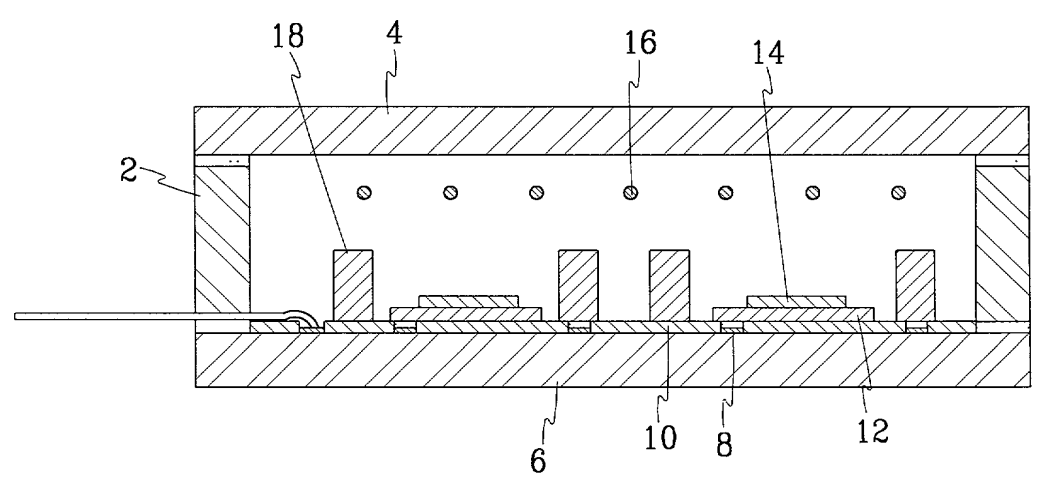

Coulam et al.	
Study	OR (95% CI)
Overall	1.0
Study	OR (95% CI)
1	1.0
2	1.0
3	1.0
4	1.0
5	1.0
6	1.0
7	1.0
8	1.0
9	1.0
10	1.0
11	1.0
12	1.0
13	1.0
14	1.0
15	1.0
16	1.0
17	1.0
18	1.0
19	1.0
20	1.0
21	1.0
22	1.0
23	1.0
24	1.0
25	1.0
26	1.0
27	1.0
28	1.0
29	1.0
30	1.0
31	1.0
32	1.0
33	1.0
34	1.0
35	1.0
36	1.0
37	1.0
38	1.0
39	1.0
40	1.0
41	1.0
42	1.0
43	1.0
44	1.0
45	1.0
46	1.0
47	1.0
48	1.0
49	1.0
50	1.0
51	1.0
52	1.0
53	1.0
54	1.0
55	1.0
56	1.0
57	1.0
58	1.0
59	1.0
60	1.0
61	1.0
62	1.0
63	1.0
64	1.0
65	1.0
66	1.0
67	1.0
68	1.0
69	1.0
70	1.0
71	1.0
72	1.0
73	1.0
74	1.0
75	1.0
76	1.0
77	1.0
78	1.0
79	1.0
80	1.0
81	1.0
82	1.0
83	1.0
84	1.0
85	1.0
86	1.0
87	1.0
88	1.0
89	1.0
90	1.0
91	1.0
92	1.0
93	1.0
94	1.0
95	1.0
96	1.0
97	1.0
98	1.0
99	1.0
100	1.0



FIG.8

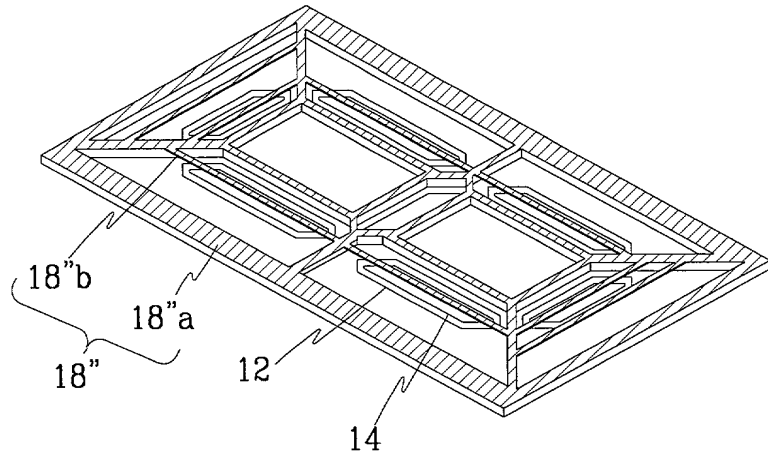


FIG.9

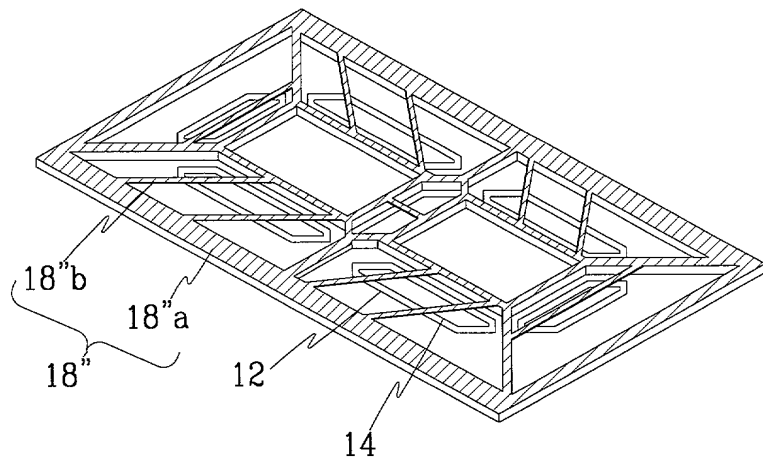


FIG.10

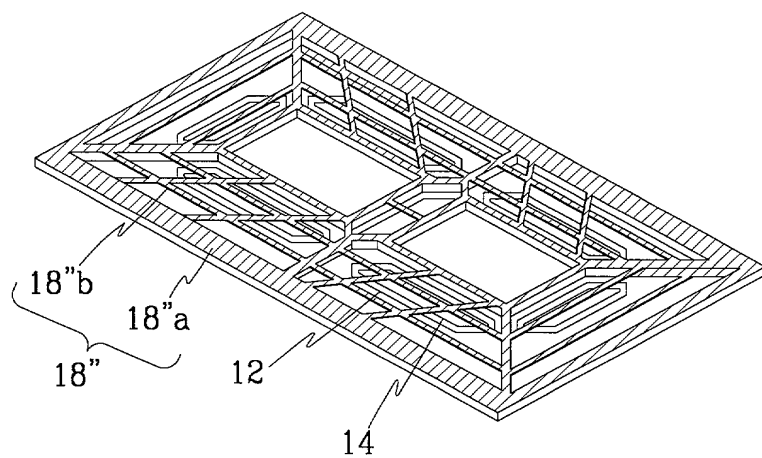


FIG.11


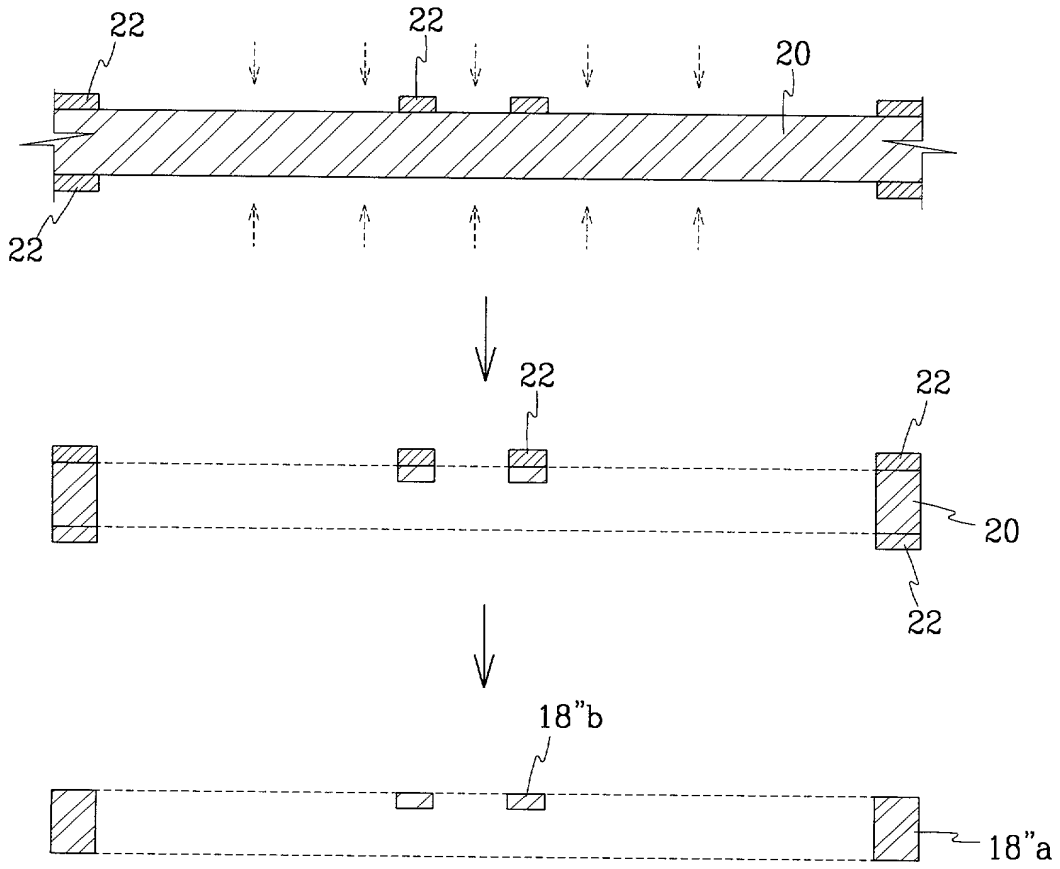


FIG.12

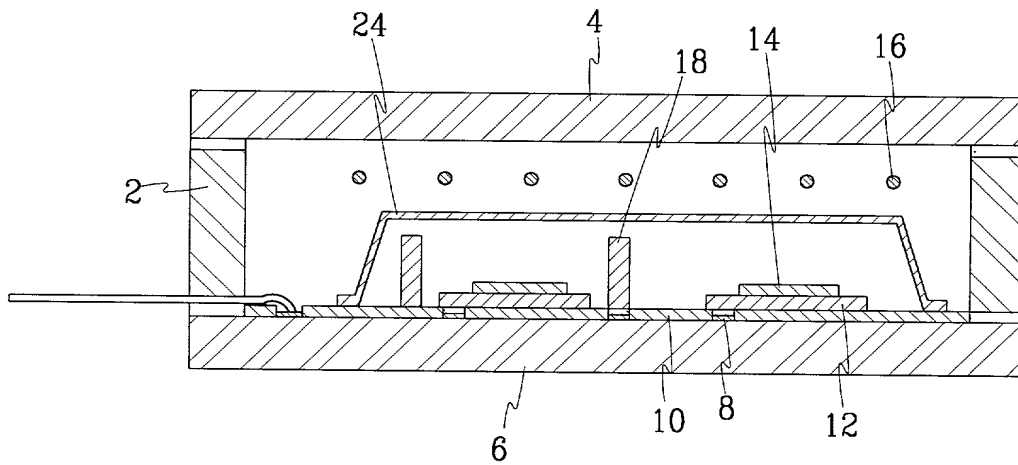

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONS**

PATENT

Docket No. : 40164/DBP/Y35

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled VACUUM FLUORESCENT DISPLAY, the specification of which is attached hereto unless the following is checked:

___ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on ___ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of the foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

<u>Application Number</u>	<u>Country</u>	<u>Filing Date (day/month/year)</u>	<u>Priority Claimed</u>
1999-34630	Korea	20/08/99	YES
2000-15011	Korea	24/03/00	YES
2000-32516	Korea	13/06/00	YES

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

<u>Application Number</u>	<u>Filing Date</u>
---------------------------	--------------------

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>Application Number</u>	<u>Filing Date</u>	<u>Patented/Pending/Abandoned</u>
---------------------------	--------------------	-----------------------------------

POWER OF ATTORNEY: I hereby appoint the following attorneys and agents of the law firm CHRISTIE, PARKER & HALE, LLP to prosecute this application and any international application under the Patent Cooperation Treaty based on it and to transact all business in the U.S. Patent and Trademark Office connected with either of them in accordance with instructions from the assignee of the entire interest in this application;

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONS**

Docket No. 40164/DBP/Y35

or from the first or sole inventor named below in the event the application is not assigned; or from YOU ME PATENT & LAW FRIM in the event the power granted herein is for an application filed on behalf of a foreign attorney or agent.

R. W. Johnston	(17,968)	Gregory S. Lampert	(35,581)	Phuong-Quan Hoang	(41,839)
D. Bruce Prout	(20,958)	Grant T. Langton	(39,739)	Cynthia A. Bonner	(44,548)
Hayden A. Carney	(22,653)	Constantine Marantidis	(39,759)	Jun-Young E. Jeon	(43,693)
Richard J. Ward, Jr.	(24,187)	Daniel R. Kimbell	(34,849)	Marc A. Karish	(44,816)
Russell R. Palmer, Jr.	(22,994)	Craig A. Gelfound	(41,032)	John F. O'Rourke	(38,985)
LeRoy T. Rahn	(20,356)	Syed A. Hasan	(41,057)	Richard J. Paciulan	(28,248)
Richard D. Seibel	(22,134)	Kathleen M. Olster	(42,052)	Josephine E. Chang	(46,083)
Walter G. Maxwell	(25,355)	Daniel M. Cavanagh	(41,661)	Frank L. Cire	(42,419)
William P. Christie	(29,371)	Molly A. Holman	(40,022)	Harold E. Wurst	(22,183)
David A. Dillard	(30,831)	Lucinda G. Auciello	(42,270)	Robert A. Green	(28,301)
Thomas J. Daly	(32,213)	Norman E. Carte	(30,455)	Derrick W. Reed	(40,138)
Vincent G. Gioia	(19,959)	Joel A. Kauth	(41,886)	Stephen D. Burbach	(40,285)
Edward R. Schwartz	(31,135)	Patrick Y. Ikehara	(42,681)	David B. Sandelands, Jr.	(46,023)
John D. Carpenter	(34,133)	Mark Garscia	(31,953)	Heidi L. Eisenhut	(P-46,812)
David A. Plumley	(37,208)	Gary J. Nelson	(44,257)	Nicholas J. Pauley	(44,999)
Wesley W. Monroe	(39,778)	Raymond R. Tabandeh	(43,945)	Mark J. Marcelli	(36,593)

The authority under this Power of Attorney of each person named above shall automatically terminate and be revoked upon such person ceasing to be a member or associate of or of counsel to that law firm.

DIRECT TELEPHONE CALLS TO : D. Bruce Prout, 626/795-9900
SEND CORRESPONDENCE TO : CHRISTIE, PARKER & HALE, LLP
P.O. Box 7068, Pasadena, CA 91109-7068

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first joint inventor Chul-Woo Park	Inventor's signature	Date
Residence and Post Office Address 852, Kacheon-ri, Samnam-myun, Ulju-kun, Ulsan-city, Korea		Citizenship Korean

Full name of second joint inventor Kwon-Soo Choi	Inventor's signature	Date
Residence and Post Office Address 818, Kacheon-ri, Samnam-myun, Ulju-kun, Ulsan-city, Korea		Citizenship Korean